

TECHNICAL RIDER, **ANNEXE 1 OF THE CONTRACT**, adjustable following the location

Length of the show : about 1h15 without intermission

Capacity: 483 seats + 8 disabled places or 499 seats with no disabled person

As we modify tribune to have disabled places, it's very important as possible to register disabled person during tickets booking

Colporteurs crew: 16 persons (2 big top technicians who will not stay for the shows)

BIG TOP DESCRIPTIVE

Ground surface : 660 m²

Security perimeter : 38 meters

Type : 4 poles (with circular cupola of 8,5 m diameter and 9,90 meter high)

Pole height : 12,5 meters

Dome height : 15 meters

Total diameter including guying and tent circle : 32 meters

Circular tribune of 7 rows (exterior 23 meters, interior 13 meters, height 3 meters)

Ring diameter : 13 meters

We're completely independent concerning the safety and security conditions necessary to welcome an audience. We provide all emergency exit spots, the fire extinguishers, a megaphone and emergency lighting.

VEHICLES DESCRIPTIVE

2 trucks + trailers of 32 tons (Big Top + Tribune) one is a double-side (23m).

1 truck 12m / 26t (stage equipment)

1 truck of 19 tons with a big caravan (showers, stage equipment)

10 caravans or camping cars +8 cars.

For more details (registration, mark, type...), please ask us for the convoy file

SPACE DESCRIPTIVE

The company must be informed about soil and sub soil type in order to evaluate necessary gears and time of work to set up everything.

Surface: 2500 m2 minimum (1 big top / toilets / camp / security road), height must be **free of obstacles within 16 meters**. The set up of the big top must be done on **a steady site regularly leveled**, lying flat: the slope must be the nearest of 0% (anyway the compulsory slope **must be less than 2%**) any obstacle, clean, flood proof without mud in a quiet place. In case of lawn, **the grass will have to be mown short the day before the arrival of the technical crew.**

Access: This site must be totally accessible for trucks (40 tons), 2,5 meters wide, 4,20 meters high.
The local promoter will provide the Colporteurs Company with **a map indicating the access to the area for all trucks and a van**. Mind the height of the bridges, other porticoes and narrow streets.

Careful: indicate market days, street parties....

Enclosure:

The promoter should provide 200 m of barriers for big top installation (heating, electrical board,...).

The promoter should appreciate the site enclosure in order to confirm the safety and the security of the site.

Site : The local promoter will previously provide, at his expenses, **a drawing of the soil and the subsoil masses on which must be clearly indicated the different species of the soils, the drawing of different water pipes (in & out), gas pipes or nay kind of pipes, optical, electric and phones wires.**

Both big top uses big iron pickets of a 1,2 meter length and, they will driven into the ground. Any pipes that pass through the site, **whose depth is less than 1,2 meters should be drawn on the ground before the arrival of the company.**

Promoters would be responsible of any accident in the sense of that these pieces of information (drawings or maps), provided by the local promoter, would be wrongly given or incomplete.

SET UP AND ELECTRICAL ALIMENTATION

Electricity and water must be available from the arrival to the departure of the company. One electrician will be available to connect all our electrical gears to the electrical arrival.

Stabilized electrical alimentation 180A Tetrapolar :

For the Set up (D-4):

- 1 outlet 63 A tetrapolar for the camp. **We provide cable and electrical board (50 m)**
- 1 outlet 32 A tetrapolar. **We provide cable and electrical board (50 m).**

For the Set up (D-2 / 17h)

- 1 outlet 125 A tetrapolar. **We provide cable and electrical board (50 m).**

Promoter should provide on separate board site and security lighting.

For three Phases, our cables are equipped with European connecting type "CEE Form", Red.
For all connecting single phase, our cable are equipped with connecting type "CEE Form".

Three Phases



Single phase



female



Male

If the general electrical alimentation is very far from the big top, please contact us to find solutions for the electrical loss.

In case we can't have sufficient electrical arrival, **the promoter should rent a generator of 150 KWA, soundproof and regulate.** Thanks for checking with the renter **fuel filters have been changed** and precise him that it's used with **electronic so it has to be good quality.**

Depending of the season, these requests can be adjusted if needed

Water arrival:

- 1 drinking water arrival at least with 2 near the camp for caravans with link type 20/27.
- 1 water drain evacuation near the campsite

Restroom / showers :

- We provide 2 dry toilets for the public (1 ladies / disabled person + 1 for men) + 2 dry toilets for the campsite. A center for the disposal of the waste and compost must be found close to the site. The transport of the waste and associated costs will be taken care of by the organizer. We also ask that you provide the sawdust necessary for the use of dry toilets. Sawdust can be collected for free from sawmills, just make sure that it is from untreated wood.
- We also provide showers for the campsite which are in a fully equipped truck.

If for any reason we do not bring our toilets or showers, promoter must provide **1 set of sanitary** appliance, forbidden to the audience, and cleaned (that is to say cleaned, sufficiently provided with toilets paper,...) at least once a day at the promoter's expenses and at least composed of :

- **3 showers with enough hot water** for 16 persons permanently needed.
- **3 toilets (NO CHEMICAL)** one of which will be made for **DISABLED PERSON**
- **1 area** with water and pipes for a washing machine (we provide it), this is for the personal use of the crew of the company « les Colporteurs ».

This set of sanitary will be provided with electricity sufficient to allow, **both** the plugging of the washing machine and, at least, 2 plug socket more for the plugging of small electric apparatus like razor, hair dryer, etc...

It is also necessary to have full heating and lights in the restroom/shower.

Audience restroom will be provide by the promoter if necessary.

Heating of big top :

For the big top, we provide two moving heaters (air forced) of 135 Kw. and 8.000 m³/h each which, if needed , will be used during the set up , the rehearsal , the show and tear down. These heaters will be located outside and at 5 meters away from the tent (we have tubes between both).

If necessary (cold temps., snow,...) we will have to use these heaters.

Local promoter should provide :

2 Tanks : minimum capacity 200 liters each + according to the national norms of the country, regarding security and ecology.

Fuel : Oil for heater / Consumption : +/- 10 liters / hour / heater (depending on the temperature).

The fuel delivery will be organized with technical director of the company.

EQUIPMENT PROVIDED BY PROMOTER

Every estimate of rented equipment has to be validated by the technical director of the company at least 10 days before the arrival.

All equipment requested has to be on the area **at the arrival of the technical crew (D-4).**

Area should be surrounded with barriers before the arrival of the company.

From D-4 morning until D-4 evening, promoter should provide:

- **1 mobile compressors sound proof** of 3000 litres/mn minimum delivery, with fuel.
- **1 tubes** of 30 meters each to be connected to the compressor and the hammers.

In case of very compact subsoil, provide us a high quality power drill with a broach metal of 40 mm and 45 mm and length 600 mm.

From D-4 and D-3, promoter should provide :

- **1 Fork lift** capable to lift up **2 tons at 4 meters high** corresponding to the soil and it is **compulsory** to be equipped with **translator system and with lighting system.**

This **Fork lift** will have to be delivered with the necessary fuel.



For the tear-down (2 days) :

- **one similar Forks lift, with lighting system**, which will be delivered on the last day of the show until the end of the tear-down.
In any case, we don't need a telescopic jib.

Fenwick using will be strictly reserved to the company and we provide drivers.

For setup and Tear-down, thanks to provide :

- 1 set of gloves, security shoes and safety helmet for the all crew (See personal request)
- Sound proof headphones for all tent crew (See personal request)

The outdoor lighting and the security lighting are the responsibility of the Promoter.
They can't be plugged on the electric board of the Big top. One independent board must be provided.

In case of out of order material, this one should be changed in the next 30 minutes. Thanks for taking all the dispositions before.
Two days is, on average, the time needed to achieve the set up of the big top. Nevertheless, in case of problems due to the soil or out of order material, to weather conditions, the average time could be modified. In this case, the local promoter will provide equipments and staff till the end of the set up. same condition for dismantling the big top .

COMPAGNY RECEPTION AND OTHERS

Catering : Cheese, cooked meat, bread, fresh fruit (bananas...), water and chocolate for 12 persons each day of show with a delivery at 4 p.m.

Dressing room : In case our caravans cannot be near the big top, the local promoter will provide **a space which can be used as a dressing room, which can be locked, heated, lighted and provided with hot and cold water.** In this case, the dressing room will be composed of at least and compulsory: mirrors, racks for suits, sink connected to the water supply and the draining of the water, enough table and chairs for 12 persons.

Audience reception : At his expense, the local promoter will provide 8 hostesses (2 outside to control the tickets and 6 inside the big top to guarantee the security of the audience) these 8 persons will have to be available at least a hour before the opening of the gates (see personal request annex)

It's better if it's always the same persons.

Audience entry will be done by only one door and we open it 30mn before the show.

Rider **Sous la Toile de Jerhonimus**
Cie Les Colporteurs

- Sound check :** We request 45mn per day to do our sound check, if there are any difficulties please tell us before to find a solution.
- Piano's tuning :** On stage, we provide and use a piano with strings.
The local promoter will provide, at his expenses, a professional tuner able to tune this piano. The first tuning will be the day of the first performance (D-0) at 1 p.m. After, this piano will be tuned **every five performances**.
- Security :** If the caravans are not close to the big top, the promoter will provide **a guardian appropriate to the location from the end of the show until 2 p.m the next day. 24H/24 during day off.**
But normally we ask caretaking from the end of the show until 8 a.m the following day. (See crew asked)
- Costumes :** We possess 1 set of costumes for the performance. Every day, and just after the show, **the costumes must be washed and cannot be dried in a machine.**
The set cleaned the day before **must be ironed** and delivered minimum 1 hour before the show.
The local promoter will provide, at his expense, a capable staff to deal with the washing and ironing the set of the show and this from the first show (D-0) until the last show included. See **dealing with the costumes** .
- Drinking :** From the arrival until our departure, please provide still mineral water in small bottles in sufficient for 16 persons. 48 bottles per day.
- Cleaning :** Every day of the show, the local promoter will provide, at his expense, 1 person during one hour to clean audience toilets.
- Waste :** Colporteurs company is used to selecting waste. The local promoter will provide the company a special tank according to the time of the side which will be regularly emptied and which will allow to select waste. We'll apply the rules adopted by the place.
- Weather forecast :** The local promoter will provide, each day, a weather forecast, on a sheet of paper and, from the arrival of our tent crew until the end of the tent dismantling !
These documents are really important for the security of the tent and for all the involved people.
- Parking :** The promoter will provide a secure parking place to his charge with all authorizations to park all our trucks if it's not possible to leave them near the big top. We need minimum 2 trucks, 1 van and 3 cars stay on the site, near the big top.

Important:

- All gears and rental equipment will be supported by the promoter.
- all equipment rental must be approved by the Technical Director of the company, at least 10 days before the installation of the Big top.
- The staff provided by the promoter could not leave before the end of the work and without our consent.
- The technical rider and its annex (sound, light, costumes, technical personal asked) are included to the contract.



**The company (*)
Les Colporteurs**

The Organizer / Promoter (*)



**The technical director
of Promoter (*)**

(*) Before sign please write « read and approved »

Implantation grand chapiteau

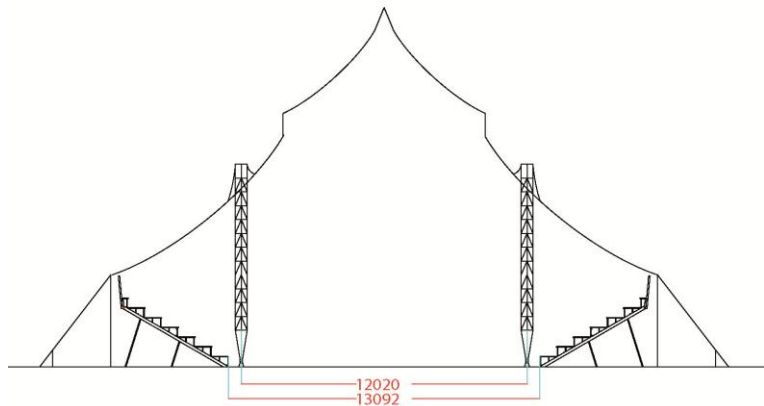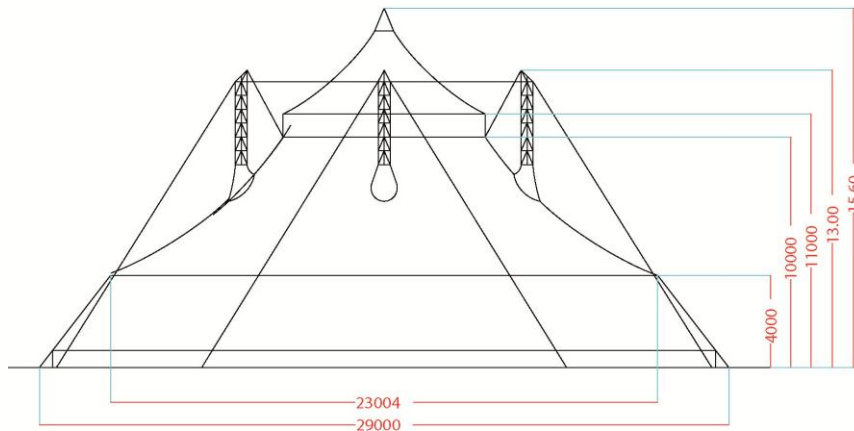

Implantation Gradin / mâts grand chapiteau

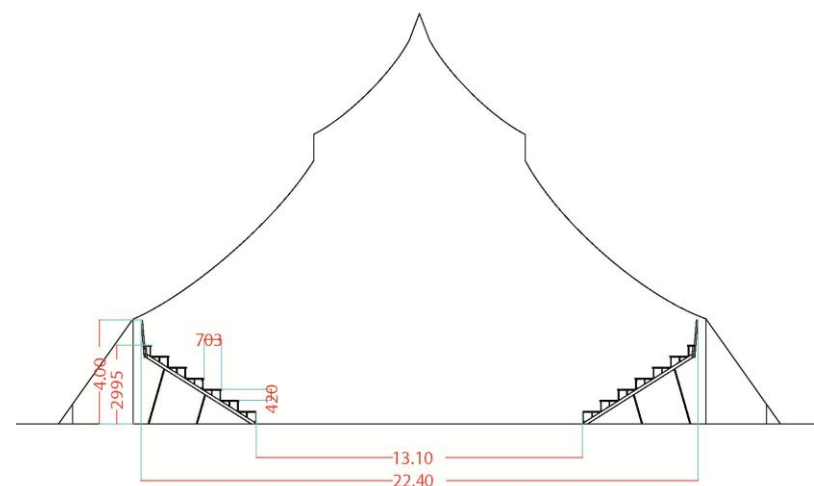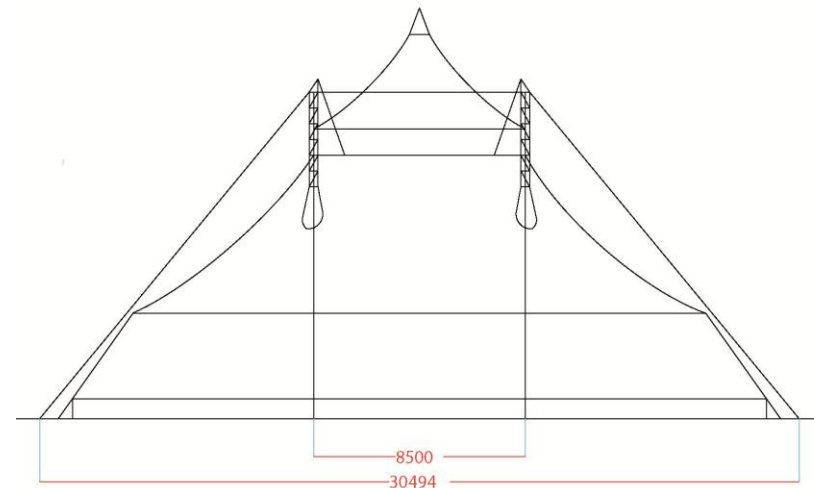

Rider Sous la Toile de Jerhonimus Cie Les Colporteurs

Update 12/07/2016

TECHNICAL PERSONNAL ASKED

PLANNING ESTIMATED

We ask ONLY QUALIFIED PERSONNEL

SET UP :

	COLPORTEURS CREW	CREW PROVIDED BY THE PROMOTER										
		Site Manager	Stage Manager	Tent crew	Light chief	Light Tech	Sound Tech	Dresser	Cleaners	Caretakers	Hostesses	Tuner
D-5 4:00 PM - Trucks arrival + installation	1 Tech Dr + 4 big top tech	1			1							
10:00 AM - 12:00 AM 12:00 AM - Tracing of Tent	1 Tech Dr + 1 big top tech	1										
D-4 2:00 PM - 6:00 PM 6:00 PM - Set Up of Big Top	1 Tech Dr + 4 big top tech	1			3							
8:00 PM - 0:00 AM 0:00 AM - Catechaling									1			
0:00 AM - 7:00 AM 7:00 AM - Catechaling										1		
8:30 AM - 12:30 AM 12:30 AM - Set Up of Big Top	1 Tech Dr + 4 big top tech	1			9							
D-3 2:00 PM - 6:00 PM 6:00 PM - Set up of Big Top + tribune + stage	1 Tech Dr + 4 big top tech	1			9							
8:00 PM - 0:00 AM 0:00 AM - Catechaling									1			
0:00 AM - 7:00 AM 7:00 AM - Catechaling										1		
8:30 AM - 12:30 AM 12:30 AM - Rigging of Stage, Sound & Lights	1 stage tech + 2 big top tech + 1 Tech Dr + 8 artists	1			3	3	1	1				
D-2 2:00 PM - 6:00 PM 6:00 PM - Rigging of stage + end of rigging of light	1 stage tech + 2 big top tech + 1 Tech Dr + 8 artists	1			3	3	1	1				
8:00 PM - 11:00 PM 11:00 PM - Light focus on drcs	1 light tech + 2 big top tech	1			1	1	1	1				
11:00 PM - 0:00 AM 0:00 AM - Catechaling									1			
0:00 AM - 8:00 AM 8:00 AM - Catechaling										1		
9:00 AM - 1 PM 1 PM - Set up dressing room and restaurants / Clean											1	
D-1 2:00 PM - 5:00 PM 5:00 PM - End of Stage	1 tech dr + 1 stage tech + 1 light tech + 1 sound tech + 8 artists	1										
6:00 PM - 8:00 PM 8:00 PM - GENERALE								1*				
10:00 PM - 0:00 AM 0:00 AM - Catechaling										1		
0:00 AM - 8:00 AM 8:00 AM - Catechaling											1	
8:00 AM - 10:00 AM 10:00 AM - Clearing of dressing, W.C.	1 Tech Dr							1				
2:00 PM - 5:00 PM 5:00 PM - End of Stage installations								1*				1
D-0 7:00 PM - 8:00 PM 8:00 PM - Training	1 tech dr + 1 stage tech + 1 light tech + 1 sound tech + 8 artists	1						1*				
8:00 PM - 10:00 PM 10:00 PM - PERFORMANCE								1*			8	
10:00 PM - 0:00 AM 0:00 AM - Catechaling											1	
* WARNING IN CASE OF THE SET UP OR THE DISMANTLING IS LATE, THE CREW PROVIDED WILL STAY UNTILL COMPLETE END OF EACH OPERATION.												
* WARNING TECH CREW HAVE TO ACCEPT TO DO DIFFERENT JOBS ON THE SET UP AND DISMANTLING												
* WARNING A DEFINITIVE PLANNING WILL BE JOIN, BASED ON THE PERFORMANCE HISTORY												

Rider Sous la Toile de Jerhonimus Cie Les Colporteurs

Update 12/07/2016

TECHNICAL PERSONNAL ASKED

PLANNING ESTIMATED

We ask ONLY QUALIFIED PERSONNEL

	COLPORTEURS CREW	CREW PROVIDED BY THE PROMOTER										
		Site Manager	Stage Manager	Tent crew	Light chief	Light Tech	Sound Tech	Dresser	Cleaners	Caretakers	Hostesses	
D	0:00 AM - 8:00 AM - Caretaking										1	
	2:00 PM - 8:00 PM preparation of welcoming audience											
	5:00 PM - 7:00 PM Final Test											
	7:00 PM - 11:00 PM PERFORMANCE	1 Tech, Dir + 1 stage tech + 1 light tech + 1 sound tech	1						1*			8
	11:00 PM - 0:00 AM Caretaking										1	

* WARNING : THE DRESSER WILL ARRIVE 3 HOURS BEFORE PERFORMANCE TO IRON COSTUMES + WILL HELP ARTISTS TO CHANGE COSTUMES DURING PERFORMANCE AND WILL WASH COSTUMES AFTER PERFORMANCE.

SHOW'S DAYS

	COLPORTEURS CREW	CREW PROVIDED BY THE PROMOTER										
		Site Manager	Stage Manager	Tent crew	Light chief	Light Tech	Sound Tech	Dresser	Cleaners	Caretakers	Hostesses	
DISMANTLING'S DAY	0:00 AM - 8:00 AM Caretaking										1	
	5:00 PM - 7:00 PM Final Test											
	7:00 PM - 11:00 PM LAST SHOW	1 Tech, Dir + 1 stage tech + 1 light tech + 1 sound tech + 2 big top tech + 8 artists	1							1*		8
	11:00 PM - 3:00 AM Stage Dismantling											
	3:00 AM - 8:00 AM Caretaking										1	
LD+1	8:00 AM - 12:00 PM Big top dismantling											
	12:00 PM - 2:00 PM Big top dismantling	1 Tech, Dir + 3 big top tech + 1 forklift guy	1		9							
	2:00 PM - 6:00 PM Big top dismantling											
* WARNING		IN CASE OF THE SET UP OR THE DISMANTLING OF THE TENT IS LATE (BECAUSE WIND, RAIN, OR ANYTHING...) THE CREW PROVIDED WILL STAY UNTILL COMPLETE END OF EACH OPERATION.										
* WARNING		TENT CREW HAVE TO ACCEPT TO DO DIFFERENT JOBS ON THE SET UP AND DISMANTLING										

Some information and plan are available on our web site : www.lescolporteurs.com

Contacts

Technical Director :Chouin Pierre Yves Tél :+33(0)6 81 32 98 25 email : 123pyc@gmail.com
Big top Manager / stage : Max Heraud - Tél : +33 (0)6 24 36 73 15 – email : heraud.max@laposte.net
Sound engineer : Stéphane Mara - Tél. : +33(0)6 08 37 26 65 - email : stephane.mara@free.fr
Lights engineer : Olivier Duris - Tel : + 33(0)6 07 41 72 61 – email : oduris@free.fr
Production : Fanny Du Pasquier - Tél. : +33 (0)6 82 25 41 83 - e-mail : bureau@lescolporteurs.com